

# NH-5000 Series



**Through-the-wall ATM for Essential Banking Functionality, It provides the Smart Alternative ATM solution for delivering superior values to financial institutions.**

## Features

- **Easy installation**

NH-5000 Series was designed for convenient ATM set-ups and replacements of existing ATMs. Features such as fully-weatherized design, sunlight viewable LCD and rear or side access ensure operation in all environments.

- **Multipurpose**

NH-5000 Series supports both types of TTW, Drive-up and Walk-up. Offers full function operation with optional envelope depository.

- **Reliability**

NH-5000 Series has been certified under UL 291 for outdoor deployment and meets all ADA requirements. With VISA Encrypting PIN Pad (Triple DES) and UL 291 Level 1 vaults, the NH-5000 series guarantees enhanced security.



*Create your true ATM values  
Design your own portfolio*



Developed to meet the needs of our customers, **NH-5000** Series offers outstanding scalability and adaptability. The **NH-5000** series brings maximum operation revenue to your business in any financial environment

**Nautilus**  
HYOSUNG

*Nautilus Hyosung, always by your side*

# NH -5000 Series

## System Control

Intel Pentium Processor  
Microsoft Window XP

## Customer Display

10.4" TFT LCD  
Sunlight viewable  
SVGA(800x600) resolution

## Communication

Dial-up

### Optional

TCP/IP

## Input Type

4 x 2 Function keys  
Encrypting PIN pad  
(16 keys, DES, T-DES, Unique key)  
ADA compliant

## Application Software

NDC+, DDC912, Web enabled

## Supervisor Operation

5.7" mono display  
4 x 2 function keys, 16keys

## Card Handling

Dip type card reader

### Optional

IC card reader

## Cash Dispensing

2,000 notes per cassette  
(up to 3 cassettes)  
200 notes reject bin

## Printers

Thermal receipt printer

## Security

UL 291 Level 1 safe  
Dial lock

### Optional

Electronic safe lock  
KABA Mas Cencon safe lock

## Optional Devices

Envelope depository  
Heater

## Power Supply

AC 110 ~230V, 50~60Hz

## Operating Environment

Temperature  
25°F~110°F (-3°C ~ 43°C)  
with optional heater  
-30°F ~ 110°F (-34°C ~ 43°C)  
Humidity  
10% ~ 90%


## Dimension and Weight

Height : 56.4" (1,430mm)  
Width : 26.7" (678mm)  
Depth : 27.5" (700mm)  
Weight : 1200 lbs (590 kg)  
Facia  
Drive up : 27.3"(H) x 25.7"(W)  
Walk up : 36.1"(H) x 26.5"(W)  
Wall thickness : 2" ~ 10"

## Maintenance

Drive up : Side access  
Walk up : Rear access

※ New technologies and components may be implemented in the products without prior notice, so Nautilus Hyosung reserve the right to change specifications accordingly.

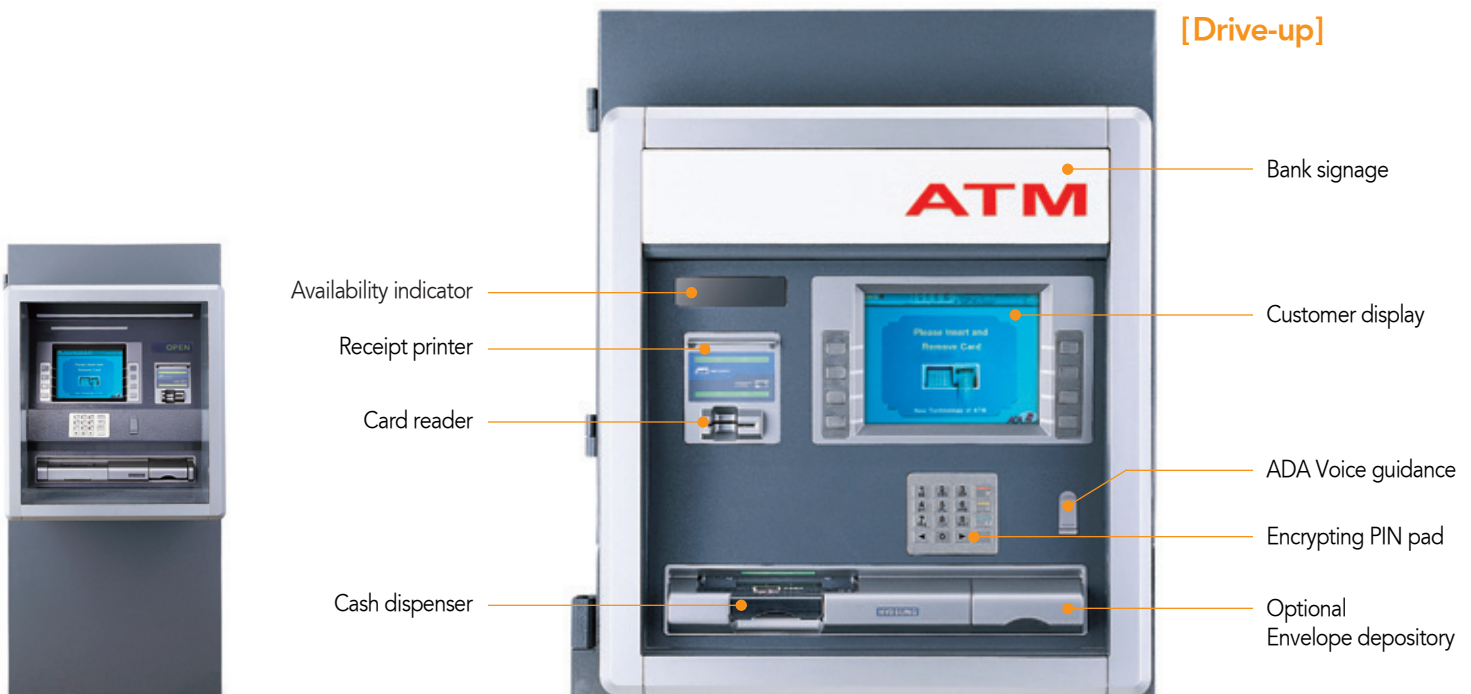

[Walk-up]

[Drive-up]

**Head office)** 52 Cheongdam-Dong, Gangnam-Gu, Seoul, Korea 135-100  
TEL:+82-2-510-0441, FAX:+82-2-3442-7993, <http://www.nautilus.hyosung.com>  
**US office)** William Square Center #218, 5205 North O'CONNOR Blvd, Irving, TX 75039  
TEL:972-443-9820, FAX:972-443-9821

**Nautilus**  
HYOSUNG